# Installation and Assembly:
## Medical Antimicrobial Video Conferencing Shelf

**Model: ACC319-AB, ACC319-AW**

**Max Load Capacity:**
25 lb (11.4 kg)

## Features:

- Treated with Agion® antimicrobial finish in black or white designed to assist with infection control.

Before you begin, make sure all parts shown are included with your product.

### Parts List

| | Description | Qty. | ACC319-AB Part # | ACC319-AW Part # |
|---|---|---|---|---|
| A | center mount | 1 | 087-S1039 | 087-S2039 |
| B | interface bracket | 1 | 087-S1047 | 087-S2047 |
| C | video conference shelf | 1 | 009-S1232 | 009-S2232 |
| D | M5 x 6 mm socket pin serrated washer head screw | 4 | 510-1114 | 510-1114 |
| E | square nut | 2 | 530-1022 | 530-1022 |
| F | 1/4 x 12 mm decorative screw | 2 | 520-2325 | 520-2325 |
| G | 4 mm security allen wrench | 1 | 560-9646 | 560-9646 |

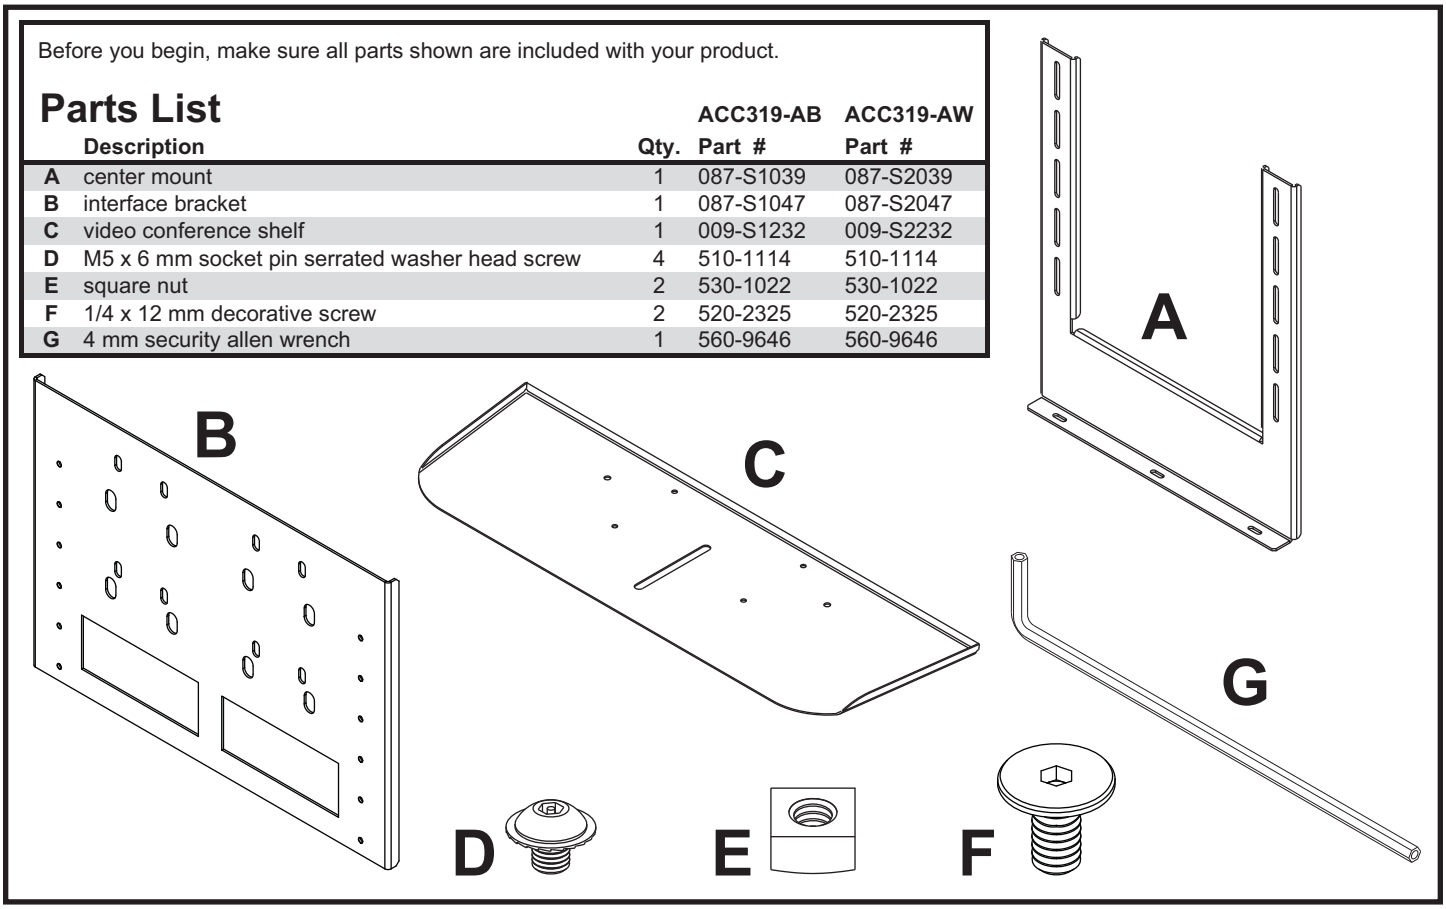


2300 White Oak Circle • Aurora, Il 60502 • (800) 865-2112 • Fax: (800) 359-6500 • www.peerlessmounts.com

ISSUED: 09-30-11 SHEET #: 009-9063-1

**NOTE:** If you are adding a new video conferencing shelf to an already assembled product, reverse steps up to the universal plate installation step (removing screen and adapter plate) following the main instruction sheet.

**1** Attach interface bracket (**B**) onto center mount (**A**) using four M5 x 6 mm socket pin serrated washer head screws (**D**). Tighten screws using 4 mm security allen wrench (**G**).

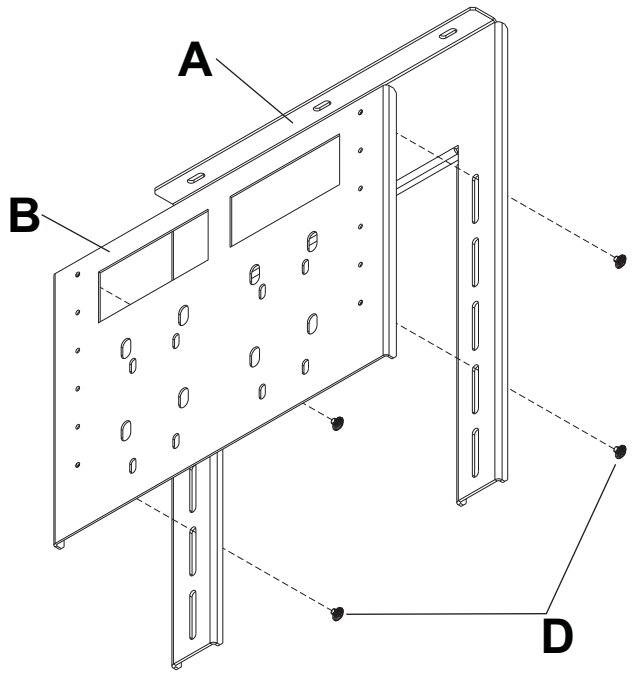


**2** Attach universal adapter plate and hook plate to interface bracket (**B**) with four M10 x 15 mm button socket cap screws.

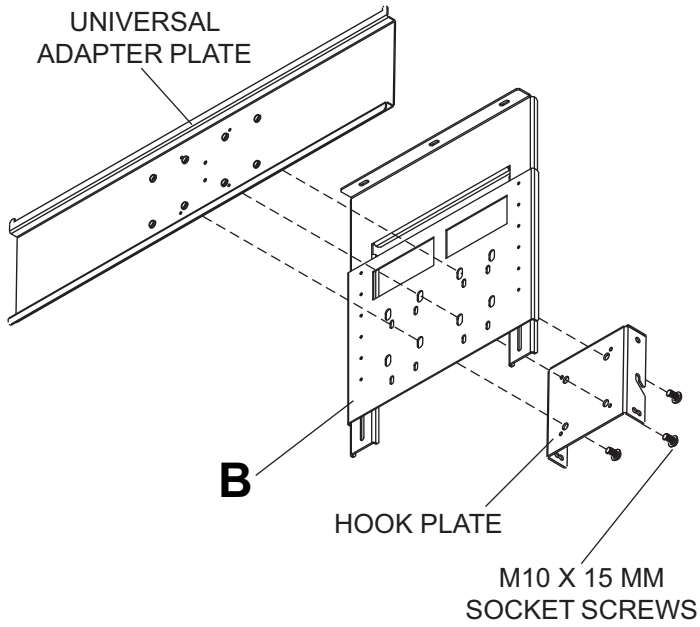


**3** Attach video conference shelf (**C**) to center mount (**A**) with two 1/4 x 12 mm decorative screws (**F**) and two square nuts (**E**) as shown below.

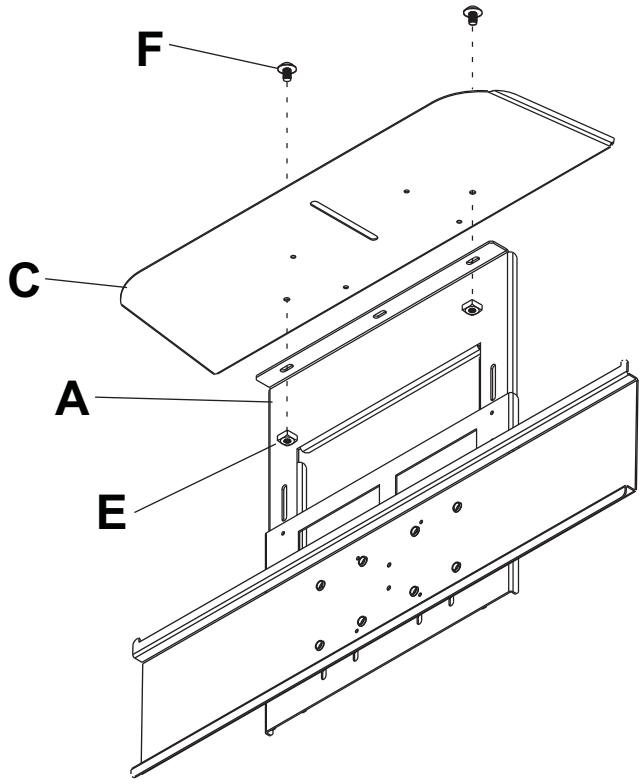

## Recommended Cleaning Guidelines

The following procedures are not guaranteed to control infection. An infection control administrator or epidemiologist should be consulted regarding cleaning procedures and processes.

Most painted components will withstand cleaning by commonly used, diluted, non-abrasive solutions such as quaternary ammonia compounds, ammonia enzyme cleaners, and bleach or alcohol solutions. However, it is recommended that any surface be tested in an inconspicuous area prior to determine the propensity for discoloration.

• Pen or permanent and dry erase markers can be removed with 91% isopropyl alcohol and a soft cloth.

• Iodine stains can be removed with commonly used cleaners and a soft cloth.

• Never use steel wool or other abrasive materials that will damage the surface finish.

• Do not use Acetone, mineral spirits, abrasive cleansers, paint thinner or any other harsh or toxic chemicals to clean your product. These solvents will damage the surface finish.

**⚠ WARNING**

- To avoid risk of electric shock, do not expose electrical components to water, cleaning solutions or other potentially corrosive liquids or substances.
- Do not use flammable cleaners on product surfaces due to close proximity of electrical power and equipment.



ISSUED: 09-30-11 SHEET #: 009-9063-1

© 2011, Peerless Industries, Inc. All rights reserved.
All other brand and product names are trademarks or registered trademarks of their respective owners.

Peerless Industries, Inc.
2300 White Oak Circle
Aurora, Il 60502
www.peerlessmounts.com